


Divy Mobile
SimpleSpec 200.63™



Installation Manual

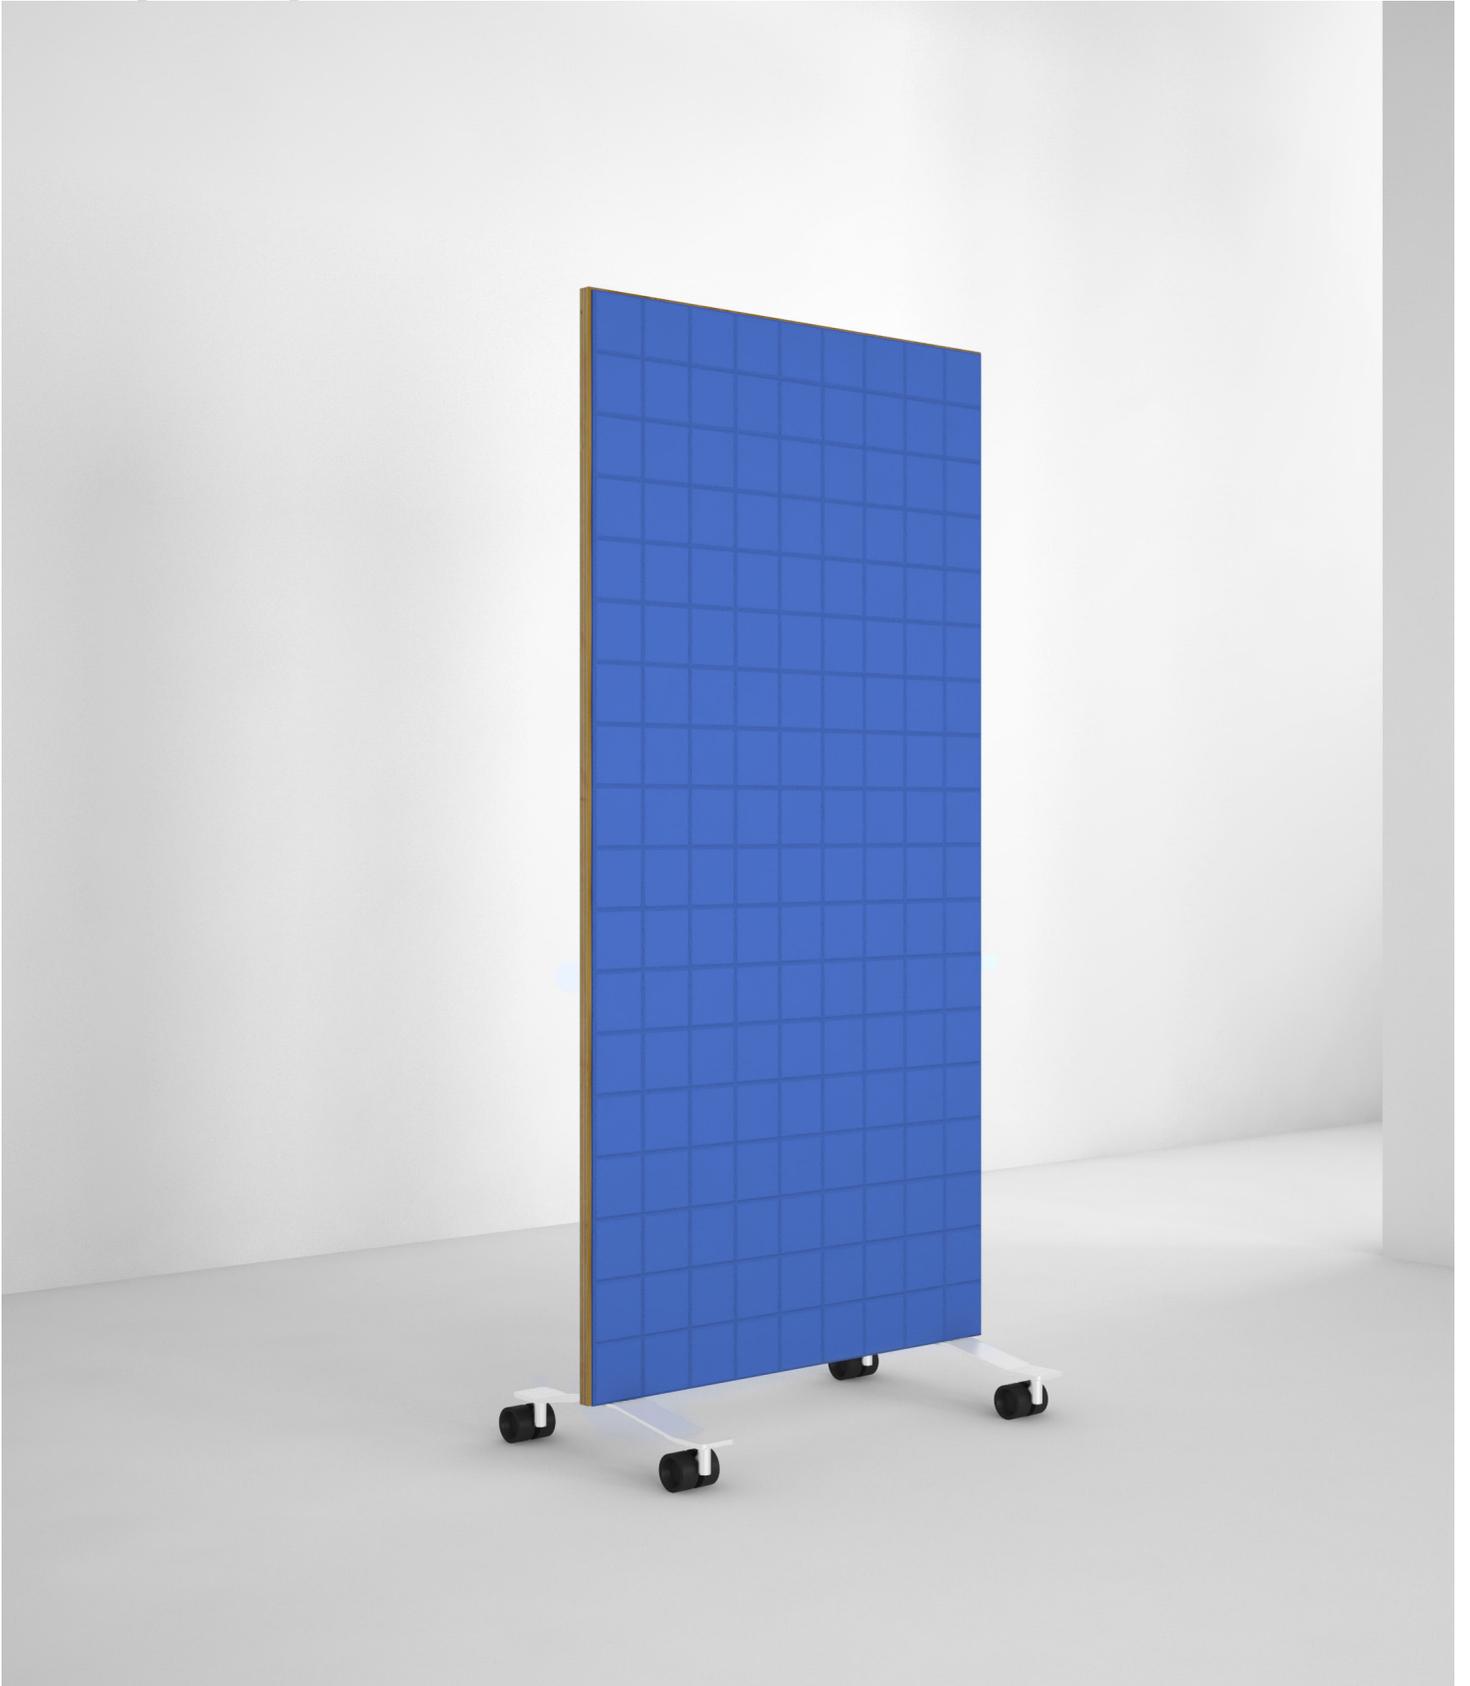

For more information, please visit [3-form.com](https://www.3-form.com) or call 800.726.0126

JUNE 2021 | MAN-RTG-200-63 | REV 005 © 2021 3form, Inc. All rights reserved.

Contents Overview

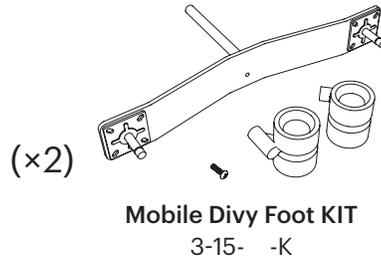
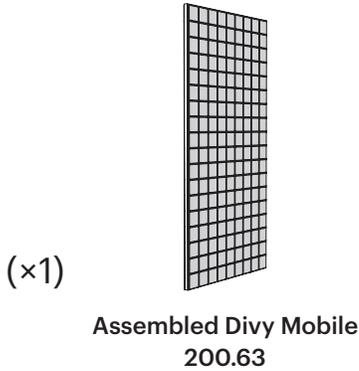


Required Tools




Overview

The SimpleSpec 200.63 solution is a free standing application that serves as a movable way to partition or divide space.

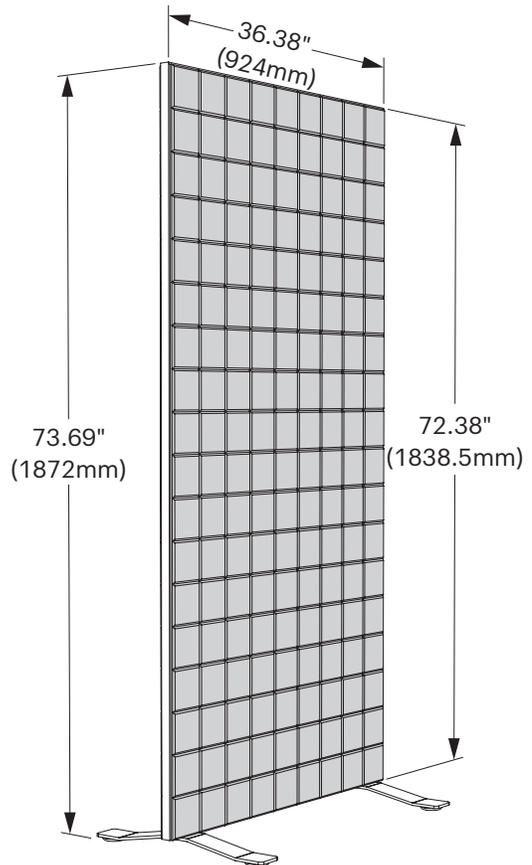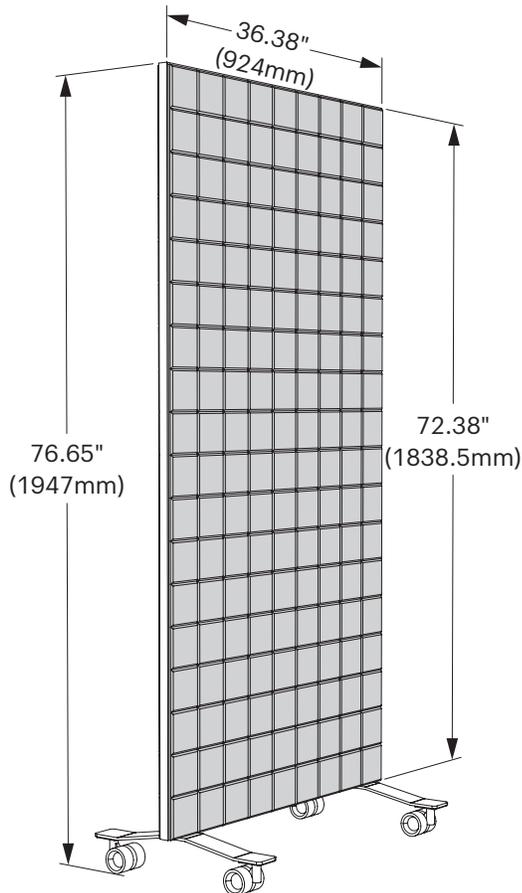


Installation

1 Attach Casters to Mounting Plate (×2)

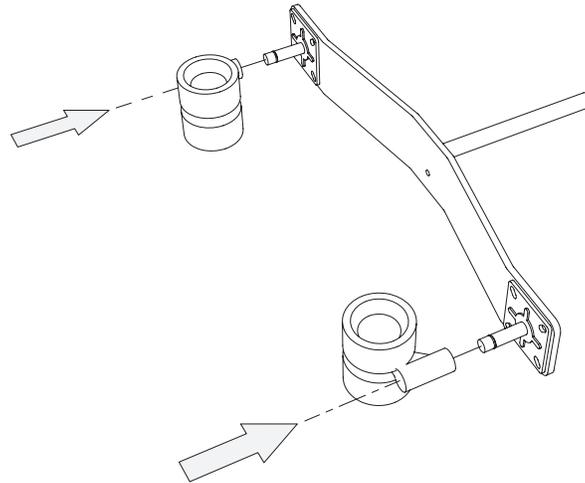

2 Attach Mounting Plate to Mobile Divy

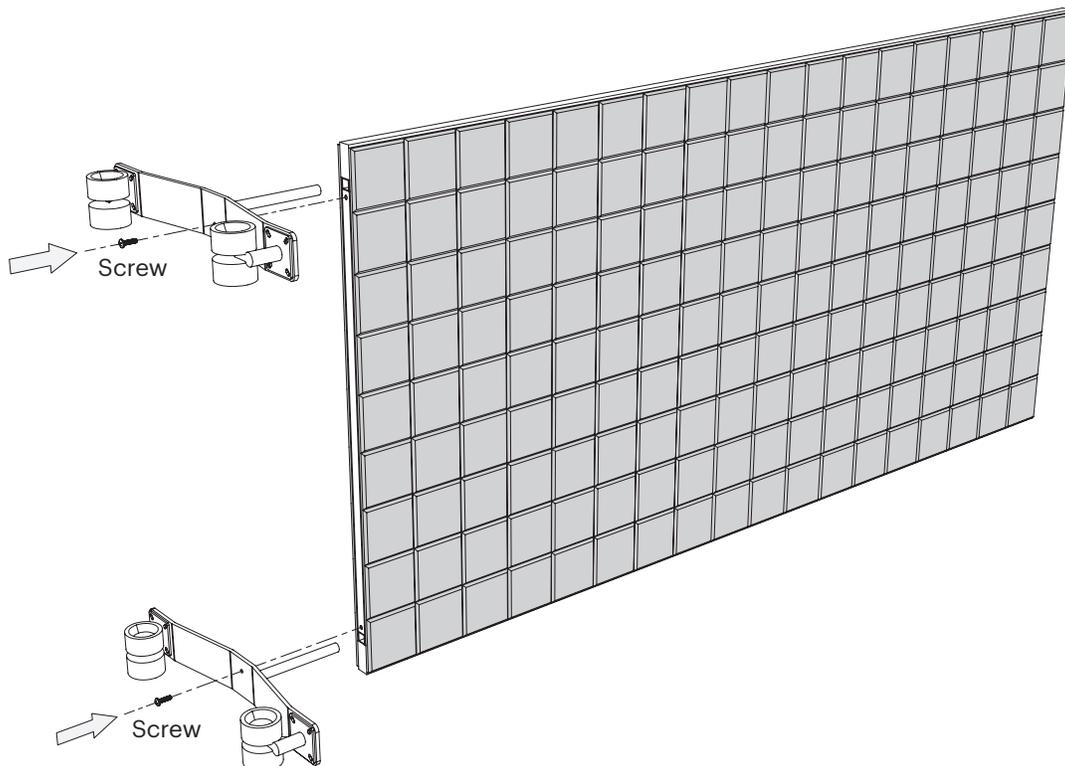


Product Description and Specifications


Features and Benefits

- Variety of color options
- 6 base patterns
- Noise Reduction Coefficient (NRC) up to 0.75
- Cost-effective decorative feature
- Easy to specify
- Easy to install


Available Patterns

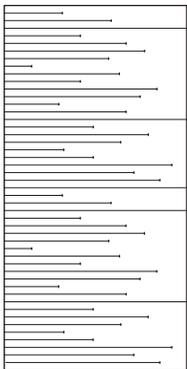


Margin

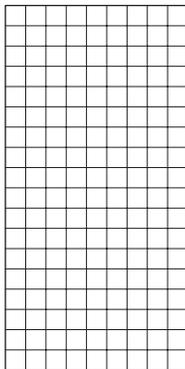


Net



Plane

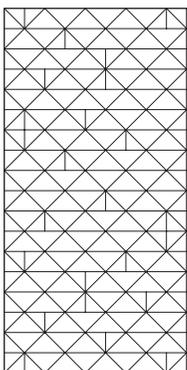

Quint

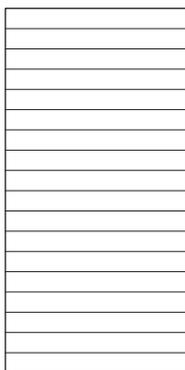

Vim

Available Finishes

Divy can be specified in a variety of color options.

See 3form's Sola Felt colors at:

<https://www.3-form.com/materials/sola-felt>

Flammability and Smoke Test Results -

Building Code Approvals

Divy Panels have been independently tested and meet the criteria for approved interior finishes as described in the 2018 International Building Code®.

Test	Sola Felt 3/8"	Result
ASTM E84 Flame Spread Smoke Generated	50 300	Class B: 26-75 <450
CAN/ULC 102.2 Flame Spread Smoke Generated	75 200	See Building Code of Canada

Sound Absorption Test Results

Solution	Test-ASTM C423-09	Result
Divy	Noise Reduction Coefficient	0.75
Divy	Sound Absorption Average	0.76
Divy	Alpha-W	0.70H

Panel Weight

Solution	Thickness	Weight
Divy Partition	1.5" (38.1 mm)	36 lbs (16.3 kg)

Cleaning Instructions

Divy Panels should be cleaned periodically. A regular, seasonal cleaning program will dramatically help prevent noticeable weathering and dirt build-up.

To remove airborne debris and dust, it is recommended to periodically vacuum Divy Panels. Please note the slight shedding of fibers from the Felt is normal and not indicative of any defect.

To treat liquid stains, remove spills immediately using a clean damp cotton cloth or with detergent soap and warm water. Carpet and fabric cleaners can usually be used; always test an inconspicuous area before the actual stain.

Do:

- Vacuum or use a soft brush to clean Divy Panels.

Do not:

- Use strong solvents, highly alkaline or abrasive cleaning agents.
- Do not completely saturate module with cleaning solution or water.